




Key Features

- Install up to 2 units to a 1 unit size rack for installation and with redudant power supply capacity
- Convert SDI signal (HD/3G/6G/12G-SDI) to HDMI 2.0 signal; support auto format adaptation
- Convert SDI signal (HD/3G/6G/12G-SDI) to fiber signal; support signal relay for long-distance transmission
- Convert HDMI 2.0 signal to SDI signal (HD/3G/6G/12G-SDI); support auto format adaptation
- Convert HDMI 2.0 signal to fiber; support medium to long-distance transmission and auto format adaptation
- Convert fiber signal to SDI signal (HD/3G/6G/12G-SDI); support medium to long-distance transmission and auto format
- Convert fiber signal to HDMI 2.0 signal; support medium to long-distance transmission and auto format adaptation
- Single-mode and multi-mode fiber module optional
- Standard Test Pattern generator built in for on-site setup
- Audio playback and embedding function
- Upgrade and control via Ethernet interface for system integration and custom development
- Back panel in lockable connection for premier quality

Application

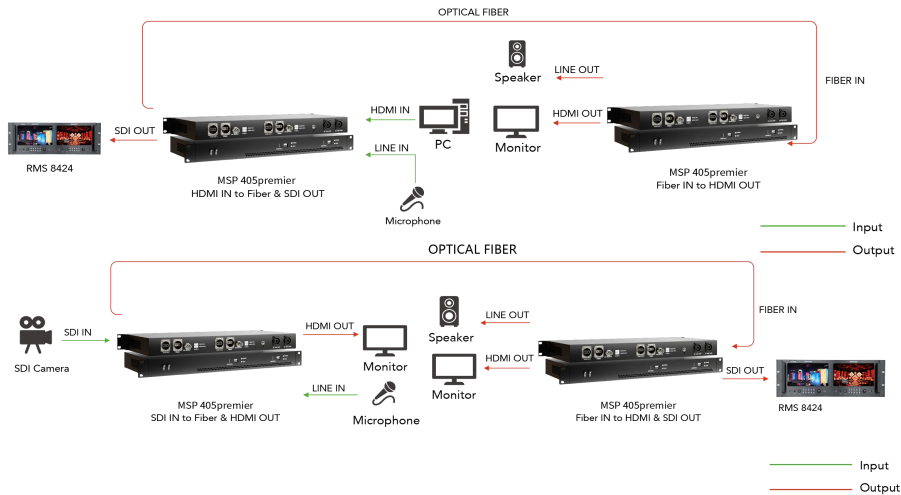

Specification

Interface	Input	HDMI	2×HDMI-A
		SDI	2×BNC
		Fiber	2×LC
	Output	HDMI	2×HDMI-A
		SDI	2×BNC
		Fiber	2×LC
	Audio	Line In	2×3.5mm Phoenix Terminal
		Line Out	2×3.5mm Phoenix Terminal
	Control	LAN	2×RJ45
		Reset	2×IP Reset Button
		Switch	2×Dial Switch
Performance	Resolution	HDMI/SDI/Fiber	720p@50/59.94/60 1080i@50/59.94/60 1080p@25/29.97/30/50/59.94/60 2160p@25/29.97/30/50/59.94/60
	Supported Standards	HDMI	2.0b
		SDI/Fiber	HD/3G/6G/12G-SDI
	Fan		1×Built-in Fan
Power	Input Voltage		AC 85~264V, 50/60Hz

Order Codes

Order Code	Item
601-0405-02-0	MSP 405premier

