


Key Features

- Compared with the 1st generation, four 12G SDI signals can be monitored in quad-view at the same time. Window C is no longer limited to HDMI In 2 and USB-C
- Each window is allowed to select independent color mode under multiview
- Support HDR waveform
- ARRI and Red added to false color
- Under quad-view mode, each window has corresponding audio pillar
- Optimize energy saving, ESD, EMI circuit
- DC 24V XLR
- Support to install v mount battery plate

Dimensions

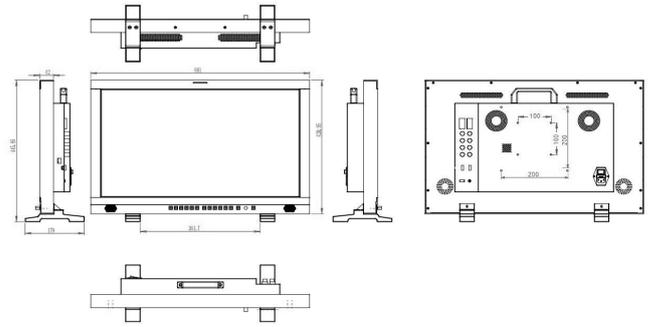

Specification

Connectors	Input	12G-SDI	4 × BNC
		HDMI	2 × HDMI-A (<i>*HDMI In 2: HDCP supported, HDMI In 1: HDCP not supported</i>)
		SFP	12G Fiber (Single Mode)
	Output (Loop)	12G-SDI	4 × BNC
Performance	Panel	Size	27 inch
		Brightness	800 cd/m2
		Type	LCD Panel
		Resolution	3840 × 2160
		Pixel Pitch	0.1369 (H) × 0.1369 (V) mm
		Aspect Ratio	16:9
		Backlight	LED
		Contrast Ratio	1200:1
		Color Depth	10bits(1.07B)
		Image Processing	12bits
Response	9ms		
Viewing Angle	178°/178°		
Video Signal Format	SDI Signal Format	1080p@50/59.94/60; 1080p@23.98/24/25/29.97/30; 720p@50/59.94/60; 3840 × 2160p@23.98/24/25/29.97/30/50/59.94/60; 2048 × 1080@23.98/24/25/29.97/30/psf, 47.95/48/50/59.94/60p; 3840 × 2160p@24/25/30; 3840 × 2160p@24/25/30/50/60;	
		HDMI Signal Format	720p@50/59.94/60;1080i@50/59.94/60; 1080p@23.98/24/25/29.97/30/50/59.94/60; 3840 × 2160p@23.98/24/25/29.97/30/50/59.94/60; 4096 × 2160p@23.98/24/25/29.97/30/50/59.94/60;
Audio	Audio De-embedding	Support	
	Audio Meter	16 channels (Up to 8 channels can be displayed simultaneously.)	
	Built-in Speaker	1 × 8 ohm/0.5W	
General	Headphone	Stereo mini Jack×1	
	Control/Update	1 × RJ45	
	GPI	GPI1-5, 1 × RJ-45	
Supported Standard	Serial Port	RS-422, 2 × RJ-45 (1 IN 1 OUT)	
		HDMI IN1	HDCP 1.X
			HDCP 2.2
SDI	SMPTE-425M-A/B		
	SMPTE-274M		
	SMPTE-296M		
	SMPTE ST 2036-1:2009		
	SMPTE ST 2048-2:2011		
	SMPTE ST 2081		
	SMPTE ST 2082		
Power	Input Voltage	AC 100~240V 50/60Hz	
	Power Consumption (Max)	98W	
Environment	Operating Temperature	-10°C ~ 55°C (14°F to 155°F)	
	Operating Humidity	30% ~ 85%, RH	
	Storage Humidity	-20 ~ 60°C	
Physical	Net Weight	11.4kg	
	Packaged Weight	15.3kg	
	Net Dimension	661mm × 420mm × 179mm	
	Packaged Dimension	890mm × 270mm × 595mm	

Order Codes

Product Code	Item
410-2700-01-0	aura UHD 27 Gen 2
490-2000-02-0	V mount battery plate kit for aura UHD 27/32 Gen 2

Contact us

Tel: +86-592-5771197

Fax: +86-592-5788216

E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China



www.rgblink.com